



Purba Medinipur Regional Office
Sankarara, P.O. Tamluk,
Dist. Purba Medinipur, West Bengal,
PIN 721 636

Ref.: WBGB/PurMid/ RO / PD / 1316 /2025-26

Date: 12.08.2025

Notice

Inviting Tender for Supply, Installation and Transfer of Electrical Works for Bhagawanpur Branch Under Purba Medinipur Region

West Bengal Gramin Bank, Purba Medinipur Regional Office, invites sealed quotations from reputed and experienced licensed electrical contractors for supply, installation, testing and commissioning of earthing and electrical wiring for CBS-related Single Phase Wiring of On-Line UPS and Cash Counter Wiring at Bhagawanpur Branch.

Scope of Work:

The work involves supply of all materials, laying of wiring, installation of equipment, connection, testing, and commissioning for the CBS-related UPS system and cash counter wiring as per the following specifications. All works must comply with relevant ISI standards, electrical safety norms, and bank requirements.

General Terms & Conditions:

1. Specifications of works are given in the format. The tender must be sealed and to be submitted within 2nd September 2025 within the banking hours at Regional Manager, West Bengal Gramin Bank, Purba Medinipur Regional Office, Sankarara, P.O. Tamluk, Dist. Purba Medinipur, West Bengal – 721636
2. The offered rate will be opened on 2nd September 2025 at 12.30 pm. Quoter in person or his representative may be present at the time of opening of rates.
3. After the scheduled date and time no offer will be accepted regarding the matter.
4. Regional Manager has the right to cancel or reject the offered rate without assigning any reason.
5. Rates should be inclusive of all taxes, duties, labor, transport, installation, and commissioning charges.
6. Warranty: Minimum 12 months' warranty on materials and workmanship.
7. 100% payment will be made after successful completion, testing, and acceptance by the bank.
8. Completion Time: Work must be completed within 15 days from the date of work order.

By Order


Regional Manager,
Purba Medinipur Region
Hospital More, Tamluk.





Purba Medinipur Regional Office
Sankarara, P.O. Tamluk,
Dist. Purba Medinipur, West Bengal,
PIN 721 636

Electrical Work-Schedule of terms:

Quotation for UPS Wiring

Sl. No.	Particulars	Unit	Rate	Amount
1.	Branch head Main Switch: Supply of new 100 amp 415 volts TPN FSU power main switch with suitable size iron frame and suitable size GI nuts & bolts with washer complete fittings and fixing etc. (Make Havells/flora)	1 unit		
2.	Full load branch generator and Electric change over: supply of new 63 amp Three phase 4pole changer over switch suitable size iron frame and suitable size GI nuts & bolts with washer complete fittings and fixing etc. .(Make Havells)/flora	1 unit		
3.	Three Phase Distribution Bus Bar: Supply of new 200 amp 3phase 4way copper bus bar with suitable size GI nuts & bolts with washer complete fittings and fixing etc..	1 unit		
4.	Supply 32Amp DP Main Switch for Electric Line. (Make Havells/Flora/Pritam)	1unit		
5.	Metter, Main Switch, Change Over, Bas Bar & 32 Amp Main Switch connection with 6mm copper wire. (Havells/Standerd/ Finolex/pritam)	16 meter		
6.	UPS input output Main line: Supply of new 1 x 2 nos 6sq.mm. (copper wire) separate phase neutral and 1 x 1 4sq.mm. earthing with 19 mm PVC stick and 20mmPVC saddle and 25mm.faxibale pipe with gland UPS input output Main line wiring complete fitting and fixing etc.(Havells/Standerd/ Finolex)	25 meter		
7.	Computer power board main line: Supply of new computer power wiring 1 x 3 nos 1.5 sq.mm. (copper wire) separate phase neutral and earthing with 19mm PVC stick and 20mmPVC saddle and 25mm connect power board main line wiring complete fitting and fixing etc.(Havells/Standerd/ Finolex)	100 meter		
8.	Computer circuit D/B: Supply of new DB single door distribution box with 6amp single pole MCB (Miniature Circuit Breaker)6 nos. complete fitting and fixing etc. (Make Havells/ L&T).	2nos		




(Handwritten signature)



Purba Medinipur Regional Office
Sankarara, P.O. Tamluk,
Dist. Purba Medinipur, West Bengal,
PIN 721 636

9.	UPS output isolator D/B: Supply of new 4 way SPN single door D/B(Distribution Box)with 40amp D/P incoming isolator 2nos complete fitting and fixing etc. (Make Havells/ L&T).	1no		
10.	UPS Output MCB D/B: Supply of new 4 way SPN single door D/B(Distribution Box)with 40amp DP MCB 2nos. complete fitting and fixing etc. (Make Havells/ L&T).	1no		
11.	UPS 1- UPS-2 Bypass Changer: Supply of new 32amp 4pole changer over switch from UPS 1 and UPS 2 bypass connection complete fitting and fixing etc. (Make Havells).	1no		
12.	UPS Input D/B: Supply of new 2 + 4 way SPN single door D/B (Distribution Box) with 40amp DP isolator 2 nos. 63amp Incoming Isolator 1no. complete fitting and fixing etc. (Make Havells/ L&T).	1no		
13.	Computer power switch board: Supply of new modular 12 OA PVC Box with 6amp. 5pin socket 4 nos, with 6amp. Single way switches 2 nos, 10amp Integrated lamp 1no. Screw with washer complete fitting and fixing etc.(Make Anchor / Pritam / Gold Metal for all switch plug, Indicator, board fuse)	11 nos		
14.	Earthing. Supply of new 300mm x 300mm copper plate electrode to be installed so that its top grated shall be at minimum depth of 2miter. Below ground label after portion of ground with charcoal 1bag and 50 KG salt and connecting with 2" inch GI pipe. coper earth leading up to 2 miter length by bolting and brazing to the GI bolts and suitable length double nuts and washers including supply and fixing with water arrangements 3'-0 PVC pipe.	1unit		
15.	Earthing Wire. 4.0 Sq.mm wire with PVC pipe, fittings & labor charge.	40 meter		
	Total			



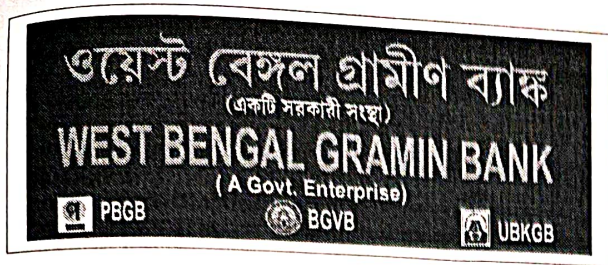

Purba Medinipur Regional Office
Sankarara, P.O. Tamluk,
Dist. Purba Medinipur, West Bengal,
PIN 721 636

Quotation for LAN Line

Sl. No.	Particulars	Unit	Rate.	Amount
1.	Old LAN line dismantling.	--		
2.	Rack Cleaning and fitting	--		
3.	Lan line wiring. D-Link	100 meter		
4.	Supply & Fixing LAN IO Box. D-Link	6nos		
5.	Lan clipping.	12nos		
	Total			

Quotation Branch Light Fan cash counter etc. Wiring

Sl. No.	Particulars	Unit	Rate	Amount
1.	Branch Light, Fan, Glow Signboard, Cash counter with 15Amp Plug Point Set wiring with Modular Switch board wiring with complete fittings with labor charge. (Wire Havells/Standard/ Finolex) (Switch Ancor/Pritom)	8 plug point		
2.	Supply & Fittings 20watt LED Tube Light with Labor Charge & fittings materials. (Havells/Orient)	20 nos		
	TOTAL			

